



## Horizontal Envirotank



Combination: UL 142 / ULC S601  
 Horizontal Envirotank  
 (Built to UL standards)


- 300 degree containment
- 100% containment

### Standard Features

- |  |   |
|--|---|
| <ul style="list-style-type: none"> <li>◆ UL 142 / ULC S601 combination label</li> <li>◆ built to UL 142 standards</li> <li>◆ 100% containment (no dike required)</li> <li>◆ With supports</li> <li>◆ Normal venting for both primary and secondary tanks</li> <li>◆ UL emergency vents</li> <li>◆ 4" fill coupler</li> <li>◆ 4" discharge coupler</li> <li>◆ 4" spare coupler</li> </ul> | <ul style="list-style-type: none"> <li>◆ 2" secondary monitor opening</li> <li>◆ Water draw off in primary tank</li> <li>◆ Dipstick with corresponding dip chart</li> <li>◆ Parts list and maintenance manual</li> <li>◆ Standard UL, tank content and warning decals</li> <li>◆ Sandblasted to SSPC-SP6 (brush blast)</li> <li>◆ Rust resistant epoxy primer</li> <li>◆ Enamel white top coat</li> <li>◆ Lifting and grounding lugs</li> </ul> |
|--|---|

### Optional Features

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>◆ Bottom fill &amp; top fill options</li> <li>◆ Discharge and pumping system options</li> <li>◆ Double bulkheads for multi compartments</li> <li>◆ Level gauges and overflow prevention</li> </ul> | <ul style="list-style-type: none"> <li>◆ Ladder, stairs and catwalks</li> <li>◆ Pump platforms and pump stands</li> <li>◆ Cabinets</li> <li>◆ Skid options</li> </ul> |
|---|---|

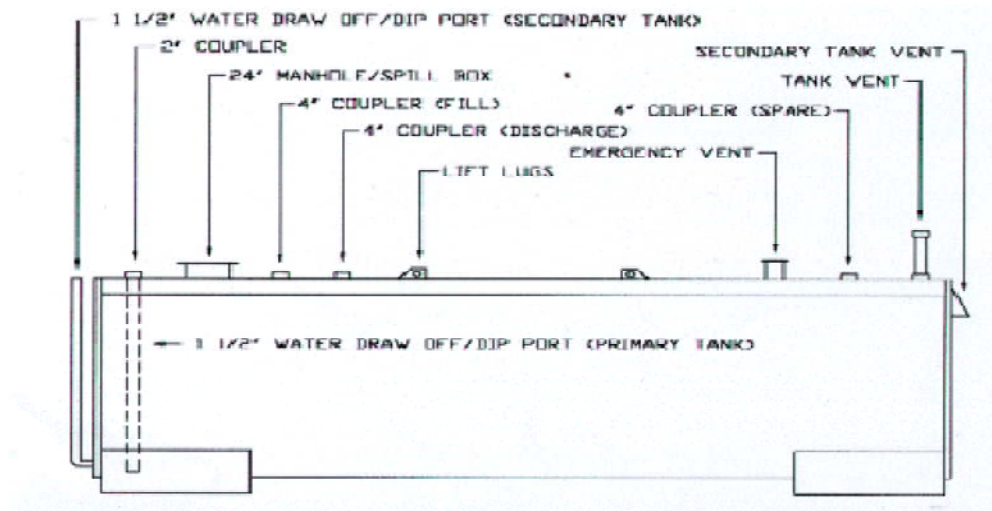

**Dimensional Chart**

Capacity	Tank Dia. I.D.	Tank Lgth	Inside Tank Thickness		Outside Tank Thickness		E-Vent	Tank Area (Approx)		Weight (Approx)
			Head	Shell	Head	Shell		Inside	Outside	
<b>Series 1</b>										
1,000 US Gal	64"	6'	10 ga	10 ga	12 ga	12 ga	6"	297 sqft	359 sqft	1,800 lbs
2,000 US Gal	64"	12'	7 ga	7 ga	10 ga	10 ga	6"	390 sqft	461 sqft	3,600 lbs
3,000 US Gal	64"	18'	7 ga	7 ga	10 ga	10 ga	6"	419 sqft	493 sqft	5,300 lbs
<b>Series 2</b>										
4,000 US Gal	7'	14'	1/4"	1/4"	7 ga	10 ga	6"	494 sqft	577 sqft	6,850 lbs
6,000 US Gal	8"	16'	1/4"	1/4"	7 ga	10 ga	6"	456 sqft	532 sqft	8,850 lbs
8,000 US Gal	8"	21'	1/4"	1/4"	7 ga	10 ga	6"	550 sqft	632 sqft	10,950 lbs
10,000 US Gal	8"	27'	1/4"	1/4"	7 ga	10 ga	8"	639 sqft	759 sqft	13,150 lbs
10,000 US Gal	9"	21'	1/4"	1/4"	7 ga	7 ga	8"	733 sqft	831 sqft	13,650 lbs
12,000 US Gal	8"	32'	1/4"	1/4"	7 ga	10 ga	8"	817 sqft	921 sqft	15,250 lbs
12,000 US Gal	9"	25'	1/4"	1/4"	7 ga	7 ga	8"	905 sqft	1017 sqft	15,750 lbs
<b>Series 3</b>										
15,000 US Gal	11'	21'	1/4"	1/4"	7 ga	7 ga	8"	967 sqft	1050 sqft	17,150 lbs
20,000 US Gal	11'	28'	1/4"	1/4"	7 ga	7 ga	8"	967 sqft	1050 sqft	21,450 lbs
25,000 US Gal	11'	36'	1/4"	1/4"	7 ga	7 ga	8"	1083 sqft	1199 sqft	26,350 lbs
30,000 US Gal	11'	42'	1/4"	1/4"	7 ga	7 ga	8"	1143 sqft	1263 sqft	30,000 lbs

\* 1/4" heads come with braces

AGI Biggar, Saskatchewan, Canada 1-800-746-6646 [www.Envirotank.com](http://www.Envirotank.com)