

A.G.I. envirotank









Fertilizer Tanks



Single Wall Fertilizer Tanks


- welded inside and out

Standard Features

-  Built to API Standards
-  1/4 inch steel floor
-  3/16 inch steel roof & side wall
-  Sandblasted to: SSPC-SP6
-  External primer: Red Oxide
-  Lifting lugs
-  API nameplate & nameplate bracket
-  Seal welded on the inside

Optional Features

- ◆ Full interior epoxy lining
- ◆ Floor & bottom ring interior
- ◆ 2 inch fill & discharge valve kits
- ◆ 3 inch fill & discharge valve kits
- ◆ Enamel top coat (color of your choice).
- ◆ Upgrade to epoxy primer from red oxide shop primer
- ◆ Ladder & cage
- ◆ Large 24" manhole with repad

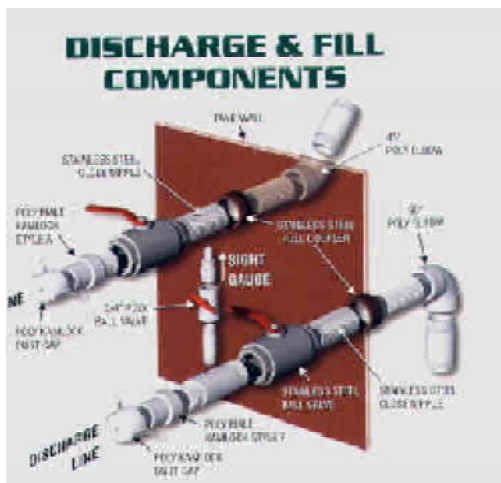

Dimensional Chart

Capacity	Tank Dia.	Tank Height	Tank Area		Weight
			Inside	Floor & 1st Course	
Series 1					
45,460 L (10,000 Gal)	138"	192"	790 sqft	321 sqft	6,400 lbs
70,500 L (15,500 Gal)	138"	288"	1,080 sqft	321 sqft	8,600 lbs
Series 2					
95,920 L (21,100 Gal)	168"	264"	1,278 sqft	418 sqft	10,360 lbs
121,650 L (26,760 Gal)	168"	336"	1,540 sqft	418 sqft	12,500 lbs
156,800 L (35,500 Gal)	168"	432"	1,893 sqft	418 sqft	15,200 lbs
Series 3					
156,800 L (35,500 Gal)	183"	360"	1,810 sqft	471 sqft	14,500 lbs
186,300 L (41,000 Gal)	183"	432"	2,100 sqft	471 sqft	16,800 lbs

AGI Biggar, Saskatchewan, Canada 1-800-746-6646 www.Envirotank.com